



Great for checking fence alignment!

(Set zero at front, then check back.)

Always retract calipers before sliding base in miter slot.

Visit our website for tips on the many uses of the Mitre Slot Base: WWW.MAG-DRO.COM

Fits most 6" Calipers
*Calipers not included

Patent Pending



MITRE SLOT BASE

Precision measurement tools at an affordable price

MAG-DRO®

MADE IN THE USA

Save time in the shop with faster and more accurate set-ups.

MAG-DRO®



Board may be used to extend length.

Retract caliper probe before sliding in miter slot.



Secure by method chosen below. Set zero and move desired distance.

Slot

Clamp



Screw

Rev. 8-11



WARNINGS:

Snag Hazard

Close Calipers before moving or removing






LIMITED WARRANTY: A one year limited warranty is provided for repair or replacement of Mitre Slot Base against manufacturing or material defects.

Caliper with Mitre Slot Base should be used with care, especially when caliper depth probe is extended. MAG-DRO will not accept responsibility for damage to calipers.

Arrows can be cut out and attached to calipers as shown in figure to the right, for clarity and direction.



Attaching Caliper to Base:

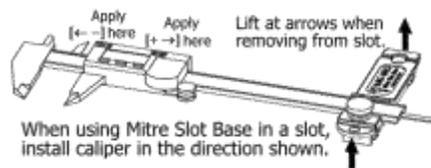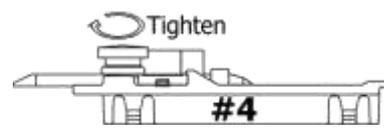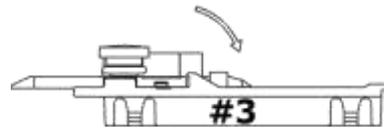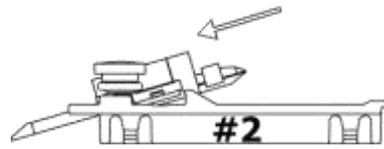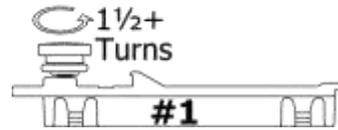

When using Mitre Slot Base in a slot, install caliper in the direction shown.