

MAG-DRO®

MITRE SLOT BASE

HOW TO CHECK THE ALIGNMENT OF THE TABLE SAW BLADE



REQUIRED

- MAG-DRO's Mitre Slot Base
- Six-inch calipers
- Painter's tape

STEPS

Unplug your saw before making this adjustment. Failure to do so may result in serious injury. Also the saw blade is sharp and care should be used to prevent injury.

1. Mark a spot on your blade with tape to allow repeatable measurements. Place tape on the blade.

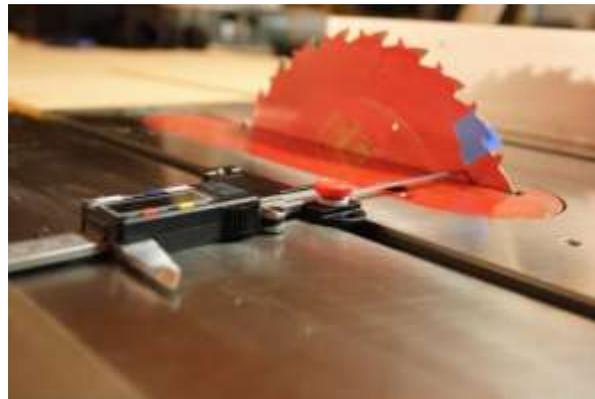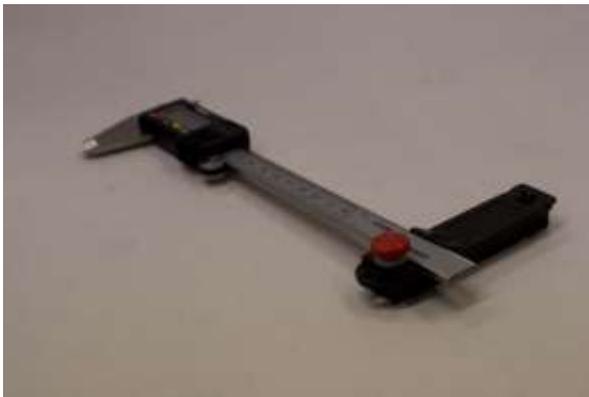

2. Place calipers in the Mitre Slot Base per figure on base. See instructions or tip on how to do this.
3. Move caliper and Mitre Slot Base to the mark on the blade while it is closest to you. Move the caliper until it touches the blade. Zero the caliper.



4. Retract the caliper, then rotate the blade so the mark is away from you, move caliper and Mitre Slot Base to the mark. Next, extend the caliper until it touches the blade. The reading on the caliper is the distance the blade is out of square.

5. If needed, adjust blade as directed in table saw instruction manual. Re-measure after each adjustment.